



## LED PANEL & DOWN LIGHT

# **RL 6308S**





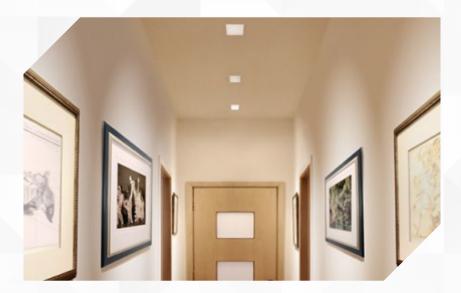

#### Housing

#### **LED Housing:**

Aluminium Die Casting

**Product Finish:** 

White

Reflector:

Diffuser

Shape:

Square

#### **Technical Specification**

Light Source:

**Epistar** 

Beam Angle:

110°

Lumens Output:

100-105lm/w

LED:

3K/4K/6K

#### **Electrical Parameters**

Power:

8W

Input Voltage:

100-240 VAC

Rated Frequency:

50~60 Hz

Power Factor:

>0.06 - >0.09

Life Span:

50.000 hrs

**Control Gear:** 

Range-Lite

### **Application**

IP Rating:

IP20

Use:

Indoor

Mounting:

Recessed

Adjustment:

Fixed

#### **Fitting Size**

Dia:

Ø95x95mm

Height:

32mm

Cut-Out:

Ø89x89mm