
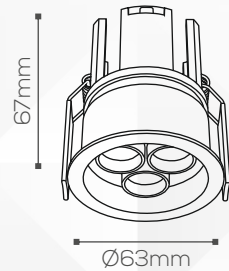


RL 80116

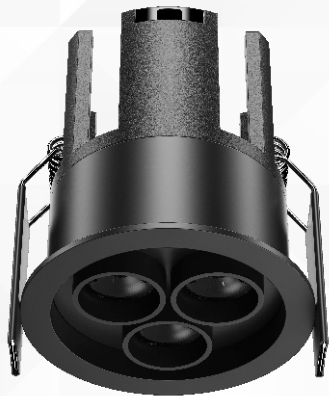

Housing

LED Housing:

Aluminium Die Casting

Product Finish:

Wh+Bk, Bk+Bk

Reflector:

Aluminium Anodized

Shape:

Round

Technical Specification

Light Source:

Bridgelux

Beam Angle:

36°

Lumens Output:

880lm

LED:

3K/4K

Electrical Parameters

Power:

8W

Input Voltage:

100-240 VAC

Rated Frequency:

50~60 Hz

Power Factor:

>0.90

Life Span:

50,000 hrs

Control Gear:

Range-Lite

Application

IP Rating:

IP20

Use:

Indoor

Mounting:

Recessed

Adjustment:

Fixed

Fitting Size

Dia:

Ø63mm

Height:

67mm

Cut-Out:

Ø53mm