
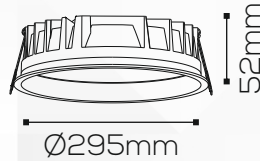


RL 470R

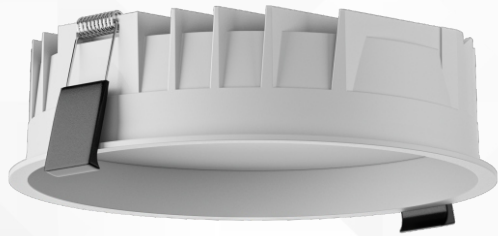

Housing

LED Housing:

Aluminium

Product Finish:

Wh, Bk

Reflector:

Diffuser

Shape:

Round

Technical Specification

Light Source:

Epistar

Beam Angle:

110°

Lumens Output:

5500lm

LED:

3K/4K/5K/6K

Electrical Parameters

Power:

48W

Input Voltage:

220-240 VAC

Rated Frequency:

50~60 Hz

Power Factor:

>0.09

Life Span:

50,000 hrs

Control Gear:

Range-Lite

Application

IP Rating:

IP20

Use:

Indoor

Mounting:

Recessed

Adjustment:

Fixed

Fitting Size

Dia:

Ø295mm

Height:

52mm

Cut-Out:

Ø285mm

INDOOR LIGHTS

